

PRODUCT REVIEW

Yaesu FT-950 HF and 6 Meter Transceiver



Reviewed by Norm Fusaro, W3IZ
Assistant Manager, Membership and
Volunteer Programs Department

Before the official opening of the JARL Ham Fair in August 2007, hidden under a black veil, Yaesu's latest player in the mid priced transceiver market waited for its introduction to the world. This is where I first saw the FT-950, the HF and 6 meter amateur transceiver that is being touted as a "baby FT-2000."

The FT-950 may be a scaled down version of Yaesu's workhorse transceivers but it certainly is not stripped down. With 100 W output on all amateur bands from 160 to 6 meters, general coverage receive, built-in automatic antenna tuner and a host of other features found in competition class transceivers, there is no doubt that this new radio will fill a void in the company's product line and in the hearts of radio amateurs looking for big rig performance in an economical package.

First Impressions

When the FT-950 is sitting side by side with the FT-2000, the inherent resemblance is striking but the similarity doesn't stop at facial features. The '950 is packed with many of the QRM-fighting and signal-enhancing features that many operators have come to know in the FT-2000 series and in Yaesu's flagship FTDX9000 series radios.¹ For example, the FT-950 includes digital noise reduction (DNR), which uses a variety of algorithms to separate signals from noise. It

also has a CONTOUR control, used to enhance the desired signal and distinguish it from noise and interference.

The FT-950 is also capable of using optional accessories such as Yaesu's Data Management Unit (DMU-2000) to provide a graphic image of the rig's operation. It's also got provisions for adding optional μ -Tune units, precision motorized preselector circuits that can enhance a weak signal or attenuate an interfering signal.² I used the optional μ -Tune units with the '950 and they had an obvious effect on received signals. Not being located near a strong broadcast station or other source of interference, I was unable to fully appreciate the preselector's performance.


Noticeably smaller than its big brother, the FT-950 is still a substantial piece of gear that makes a nice statement when sitting on the operating desk. One reason for the smaller form factor is the absence of an internal power supply. This can be a benefit to some people because many operators already own a power supply that is used to run several pieces of gear in the shack. I found that the '950 worked fine using a big, heavy 35 A Astron analog supply or when juiced with a lightweight Yaesu FP-1023 switching supply.

Weighing in at 21.6 pounds, the FT-950 is not what many would consider a "portable" rig, but with all of the big rig features in a smaller package I would consider this a remarkable field radio to be used in a variety of situations such as DXpeditions, Field Day or EOC operations. The front and rear feet

¹QST Product reviews, including the FT-2000, FT-2000D, FTDX9000D and FTDX9000 Contest, are available on the Web at www.arrl.org/members-only/prodrev/.

²The DMU-2000 and μ -Tune units were discussed in more detail in the FT-2000D Product Review in October 2007 QST.

Key Measurements Summary

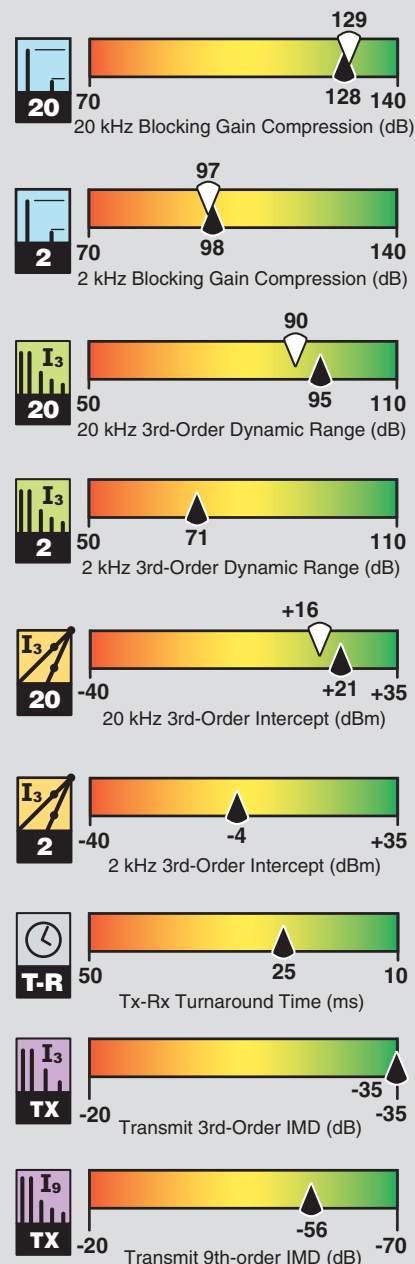

pr028

Key:

Dynamic range and intercept values with preamp off. Intercept values were determined using -97 dBm references.

80 M

20 M

Bottom Line

The FT-950 HF/50 MHz transceiver fills a void in Yaesu's product line. It should appeal to radio amateurs looking for big rig performance in an economical package.

are sturdy with the front adjustable, so you shouldn't have any trouble finding a comfortable operating position.

In order to offer a transceiver with all of the superb features that are found in the bigger rigs, cost had to be cut somewhere on the FT-950 without sacrificing operation. Jettisoning the aforementioned power supply contributed to the economy of the '950 as did replacing the FT-2000's analog meter with an LED bar graph style multimeter that is part of the brightly colored and easy to read display. The meter functions are still there — ALC, speech compression level, SWR and final amplifier drain current and voltage.

Perhaps one of the most noticeable changes (or perhaps not, depending on your operating style) is the exclusion of a second receiver. Many operators probably would not consider losing a second receiver a big sacrifice in performance because the rig uses dual VFOs, essential for split operation when working DX stations whose band allocations are different than your own.

Working a DX station that is calling CQ takes just takes a quick push of the A-B button to move the DX frequency to the sub VFO, allowing the operator to tune the main VFO

to the frequency that the DX station is listening to. Another quick poke at this button returns the rig to the appropriate receive and transmit frequencies, ready to break the pileup. A nice feature of the FT-950, also found on the FT-2000, is the TXW button. Holding the TXW button, conveniently located to the lower left of the main VFO, momentarily swaps the two VFOs allowing the operator to monitor the rig's transmit frequency. Releasing the TXW button returns the VFOs to the proper TX/RX configuration for working split. Because this is a momentary feature and does not permit the rig to transmit when activated, the TXW should all but eliminate the "wrong VFO" syndrome.

The FT-2000 rear panel includes connections for an external VHF/UHF transverter and for an external receive antenna. Both are absent from the FT-950's rear panel, and that may or may not be an issue depending on your on-air activities.

Ergonomics

The ergonomic design of the FT-950 makes it a real pleasure to operate. Some of the lesser-used controls are positioned out of the way but remain fully accessible when

needed. The more frequently used features utilize larger buttons and knobs and are placed within easy reach. Routine maneuvers, such as toggling between two antenna inputs, simply requires pushing a button located on the front of the radio.

The large knurled rubber knob of the main VFO makes tuning signals easy and comfortable. Dial torque is easily adjustable. Similar to the FT-2000 and FTDX9000 transceivers, the FT-950 has a medium sized tuning knob on the lower right of the front of the rig. In the larger radios this knob is used to tune the sub receiver and VFO B. The FT-950 uses this CLAR/VFO B knob for the clarifier (RIT/XIT) or to tune VFO B when the second VFO is activated. Just as on the larger rigs the CLAR/VFO B knob is also used to select memory channels or to navigate through the general coverage receive bands in menu selectable 1 MHz or 100 kHz increments.

The AF GAIN knob and its concentric partner, RF GAIN, use larger than normal knobs, making fine adjustments smooth and easy. A similar sized knob labeled SELECT is to the left of the main VFO, positioned beneath a bank of six buttons that activate the IF shift, IF width, contour, notch filter and optional

A Look at the Field

In the July 2007 Product Review, we compared some of the features and performance of the radios in the \$2500 to \$3000 range. With the introduction of the FT-950, there are now four desktop radios within \$100 of \$1500. They are listed in alphabetical order in Table A starting with the ICOM IC-746PRO, then the Kenwood TS-2000, the Ten-Tec Jupiter and finally the new Yaesu FT-950. This price range is above the entry level, but about half that of the middle ground radios looked at previously.

Near this range there are other radios as well, but perhaps not quite direct competition. The new Elecraft K3 100 W kit starts just above this range, but we haven't reviewed it yet. For most buyers, with usual accessory features, it will end up as competition in the next higher bracket. There are compact portable or mobile radios that are also close to this range, the ICOM IC-7000 perhaps the most obvious choice. The kit Elecraft K2/100 with a few options is in the same range, but

both of these are a bit outside this desktop market segment. Either could fill that role, especially for smaller desks.

Each of these radios offers 160 through 10 meter operation with a general coverage receiver and IF DSP. They all operate from an external 12.6 V supply. These radios offer distinct choices among the models that will make each appeal to hams with particular needs and interests. Perhaps the most dramatic difference is in V/UHF frequency coverage, which may be a decision maker for many potential buyers. I have summarized the major features and performance characteristics in Table A to make a comparison easier. Note that higher dynamic range values provide better rejection of the effects of nearby strong signals. Still, there are many subjective differences worth reviewing and all are on the ARRL members Web page in the original product reviews. — *Joel Hallas, W1ZR, Technical Editor, QST*

Table A
Key Differences Between the Contenders

Feature	IC-746PRO	TS-2000	Jupiter	FT-950
Base Price	\$1525	\$1570	\$1549	\$1475
Power Supply	Included*	\$135	\$169	\$170
MF/HF/6 Meters	Yes + 2 Meters	Yes + 2 M, 70 cm	MF/HF only	Yes
IF DSP	Yes	Yes	Yes	Yes
Dual Receiver	None	V/UHF AM-FM	None	None
14 MHz BDR (20/5/2 kHz) dB**	125/100/94	126/103/87	123/94/93	128/111/98
14 MHz 3OIMD (20/5/2 kHz) dB**	97/75/70	94/69/66	85/69/67	95/91/71
Antenna Tuner SWR Range	3:1***	3:1	10:1, \$300 Option	3:1
Firmware Downloadable	No	Yes	Yes	Yes
Electronic Memory Keyer	Yes	Yes	Yes	Yes
Transmit Audio Equalizer	Yes	Yes	Yes	Yes

*Limited time offer, regularly \$300.

**Preamp off.

***2.5:1 on 6 meters.

µ-Tune units. The operator simply presses one of the buttons to choose which function to control and then presses the SELECT knob to activate or deactivate the selected feature. Turning the knob makes the adjustments. All settings are retained when moving from feature to feature and can be recalled. An improved feature not found on the big rigs is the CLEAR button that is used to return the selected function to its default setting.

Pressing and holding the SELECT knob permits access to the CW memory keyer features. I found the keyer easy to program with standard CW paddles and easy to play back on the air. I felt that the record and playback functions could have been separated to avoid accidentally erasing one of the memories. This did not happen to me, but I can easily see how during the heat of battle some operators could overshoot the playback selections and land on a record option, hitting the SELECT knob before noticing the error. You can also use the optional FH-2 keypad to access the memory keyer.

The multifunction SELECT knob also permits access to the FT-950's digital voice keyer features if you've installed the optional DVS-6 Voice Memory Unit. With the DVS-6, you can record and play back five messages of up to 20 seconds each. The FH-2 keypad can be used to control the digital voice keyer functions as well. The keypad is more convenient to use than the SELECT knob and is a good investment if you use the internal voice or CW keyers a lot.

Menu setup and operation is similar to the FT-2000 series, FT-450 and other recent Yaesu transceivers. Press the MENU button then use the SELECT knob to call up the menu items. The 118 menu items are arranged in groups. Press the SELECT knob and turn it to scroll through the various groups (DISPLAY, MODE-SSB, TX AUDIO and so on). When you have the right group, press SELECT again and then turn the knob to scroll through the related menu items in the group. Rotate the CLAR/VFO B knob to select among the settings for the menu item. Press and hold MENU for at least 1 second to store the new settings.

With the limited front panel space, the FT-950 has only four dedicated rotary control knobs in addition to the TUNING and concentric AF/RF GAIN controls mentioned earlier. These controls are for MIC GAIN, keyer SPEED, MONI (monitor level) and SQL (squelch).

Several traditional front panel functions have moved to menus. Transmitter power output adjustment (5 W to 100 W) is now controlled from a menu. That's fine if you normally operate at one power level. It's less convenient if you need to vary your power regularly. For example, you might need to reduce power temporarily to adjust an external power amplifier or manual antenna tuner for

Table 1
Yaesu FT-950, serial number 7K030158

Manufacturer's Specifications

Frequency coverage: Receive, 0.03-56 MHz; transmit, 1.8-2, 3.5-4, 5.3305, 5.3465, 5.3665, 5.3715, 5.4035, 7-7.3, 10.1-10.15, 14-14.35, 18.068-18.168, 21-21.45, 24.89-24.99, 28-29.7, 50-54 MHz.

Power requirement: 13.8 V dc; receive, 2.1 A (signal present); transmit, 22 A (100 W out).

Modes of operation: SSB, CW, AM, FM, FSK, AFSK.

Receiver

SSB/CW sensitivity, 2.4 kHz bandwidth, 10 dB S+N/N: 0.5-1.8 MHz, 4.0 µV; 1.8-30 MHz, 0.2 µV; 50-54 MHz, 0.125 µV.

Noise figure: Not specified.

AM sensitivity, 6 kHz bandwidth, 10 dB S+N/N: 0.5-1.8 MHz, 28 µV; 1.8-30 MHz, 2 µV; 50-54 MHz, 1 µV.

FM sensitivity, 15 kHz bandwidth, 12 dB SINAD: 28-30 MHz, 0.5 µV; 50-54 MHz, 0.35 µV.

Blocking gain compression: Not specified.

Reciprocal Mixing (500 Hz BW): Not specified.

Two-Tone IMD Testing***

Band/Preamp	Spacing	Input level
3.5 MHz/Off	20 kHz	-30 dBm
		-22 dBm
		-18 dBm
14 MHz/Off	20 kHz	-25 dBm
		-18 dBm
		0 dBm
14 MHz/1	20 kHz	-35 dBm
		-25 dBm
14 MHz/2	20 kHz	-44 dBm
		-31 dBm
14 MHz/Off	5 kHz	-29 dBm
		-20 dBm
		0 dBm
14 MHz/Off	2 kHz	-49 dBm
		-35 dBm
		0 dBm
50 MHz/Off	20 kHz	-33 dBm
		-25 dBm

Second-order intercept: Not specified.

FM adjacent channel rejection: Not specified.

Measured in the ARRL Lab

Receive, as specified (sensitivity degrades below 1 MHz).
Transmit, as specified.

Receive, 2.0 A; transmit, 18 A; tested at 13.8 V dc.

As specified.

Receiver Dynamic Testing

Noise Floor (MDS), 500 Hz bandwidth:*

Preamp	Off	1	2
1.0 MHz	-109	N/A	N/A dBm
3.5 MHz	-120	-129	-136 dBm
14 MHz	-119	-130	-137 dBm
50 MHz	-119	-130	-138 dBm

14 MHz, preamp off/1/2: 29/18/7 dB.

10 dB (S+N)/N, 1 kHz, 30% modulation:

Preamp	Off	1	2
1.0 MHz	12	N/A	N/A µV
3.9 MHz	4.5	1.3	0.57 µV
50 MHz	5.1	1.4	0.56 µV

For 12 dB SINAD:

Preamp	Off	1	2
29 MHz	2.2	0.58	0.27 µV
52 MHz	2.7	0.75	0.28 µV

Gain compression, 500 Hz bandwidth:*

	20 kHz offset		5/2 kHz offset
	Preamp off/1/2**	Preamp off	
3.5 MHz	129/127/126 dB	112/97 dB	
14 MHz	128/127/127 dB	111/98 dB	
50 MHz	125/125/123 dB	114/98 dB	

20/5/2 kHz offset: -86/-69/-57 dBc.

Measured IMD level	Measured IMD DR*	Calculated IP3*
-120 dBm	90 dB	+15 dBm
-97 dBm		+16 dBm
-119 dBm	94 dB	+22 dBm
-97 dBm		+21 dBm
-39 dBm		+20 dBm
-130 dBm	95 dB	+13 dBm
-97 dBm		+11 dBm
-139 dBm	95 dB	+4 dBm
-97 dBm		+2 dBm
-120 dBm	91 dB	+17 dBm
-97 dBm		+19 dBm
-40 dBm		+20 dBm
-120 dBm	71 dB	-13 dBm
-97 dBm		-4 dBm
-33 dBm		+16 dBm
-119 dBm	86 dB	+10 dBm
-97 dBm		+11 dBm

Preamp off/1/2: +71/+71/+71 dBm.

20 kHz offset, preamp on: 29 MHz, 77 dB; 52 MHz, 79 dB.

operation on different bands. The VOX adjustments and CW delay are also set via menus.

As on other Yaesu transceivers, the '950 has a C.S (custom switch) button that you can program for quick access to a menu item (your choice, but only one at a time). This is helpful, but some operators might prefer

several C.S buttons, or better yet, the ability to assign different functions to one or more of the rotary knobs. For example, some ops might get more use from VOX DELAY or RF POWER controls than from SQL or SPEED.

You'll need a special 10-pin plug for the relay and ALC connections to an external

Receiver

FM two-tone, third-order IMD dynamic range:
Not specified

S-meter sensitivity: Not specified.

Squelch sensitivity: SSB, 0.1-1.8, 50-54 MHz,
2.0 μ V; FM, 28-30, 50-54 MHz, 1.0 μ V.

Audio output power: 2.5 W into 4 Ω at
10% THD.

IF/audio response: Not specified.

Spurious and image rejection: HF, 70 dB;
50 MHz, 60 dB.

Transmitter

Power output: HF & 50 MHz: SSB, CW, FM,
100 W (high); AM, 25 W (carrier)

Spurious and harmonic suppression:
HF, >60 dB; VHF, 65 dB.

SSB carrier suppression: >60 dB.

Undesired sideband suppression: >60 dB.

Third-order intermodulation distortion (IMD)
products: -31 dB PEP at 100 W

CW keyer speed range: Not specified.

CW keying characteristics: Not specified.

Transmit-receive turnaround time (PTT release
to 50% audio output): Not specified.

Receive-transmit turnaround time (tx delay):
Not specified.

Composite transmitted noise: Not specified.

Size (height, width, depth): 4.5 x 14.4 x 12.4 inches; weight, 21.6 pounds
(not including power supply or accessories).

Price: FT-950, \$1500; DMU-2000 data management unit, \$1000; μ -Tune kit A (160),
B (80/40) or C (30/20 meters), \$500 each.

*Initial Lab testing revealed lower than expected IMD dynamic range test results. Subsequent testing of two additional FT-950s indicated that our particular unit was defective. The Noise Floor, Blocking Gain Compression and Two-Tone IMD Testing results shown here are from another off-the-shelf FT-950, s/n 7L040087.

**When preamp 2 is switched in, the default roofing filter becomes 15 kHz. It is 3 kHz with preamp off or preamp 1. Measurements were made with default settings.

***ARRL Product Review testing now includes Two-Tone IMD results at several signal levels. Two-Tone, 3rd-Order Dynamic Range figures comparable to previous reviews are shown on the first line in each group. The "IP3" column is the calculated Third-Order Intercept Point. Second-order intercept points were determined using -97 dBm reference.

†Measurement was noise-limited at the value indicated.

‡Varies with pitch control setting.

linear amplifier. To speed things along, Yaesu offers an optional cable with the 10-pin plug on one end and bare wires on the other, ready to accept whatever plugs your amplifier requires. Another optional cable allows plug-and-play operation with Yaesu's VL-1000 "Quadra" solid-state amplifier.

Receiver Dynamic Testing

20 kHz offset, preamp on:
29 MHz, 77 dB¹; 52 MHz, 78 dB;
10 MHz offset: 52 MHz, 85 dB.

S9 signal at 14.2 MHz: preamp off,
110 μ V; preamp 1, 31 μ V;
preamp 2, 7.1 μ V; 50 MHz,
preamp off, 136 μ V; preamp 1,
38 μ V; preamp 2, 6.7 μ V.

At threshold, preamp on: SSB, 14 MHz,
0.55 μ V; FM, 29 MHz, 0.51 μ V;
52 MHz, 0.44 μ V.

3.1 W at 0.5% THD into 4 Ω (max vol).

Range at -6 dB points, (bandwidth):
CW (500 Hz): 449-948 Hz (499 Hz),[†]
Equivalent Rectangular BW: 493 Hz;
USB: 144-1707 Hz (1563 Hz);
LSB: 146-1742 Hz (1596 Hz);
AM: 114-1826 Hz (1712 Hz).

First IF rejection, 14 MHz, 84 dB;
50 MHz, 62 dB; image rejection,
14 MHz, 118 dB; 50 MHz, 71 dB.

Transmitter Dynamic Testing

HF: CW, SSB, FM, typically 108 W high,
4 W low; AM, typ. 42 W high, 3 W low;
50 MHz: CW, SSB, FM, typ 99 W high,
4 W low; AM, typ. 26 W high, 2 W low.

HF, 62 dB; VHF, 68 dB.
Meets FCC requirements.

HF, 61 dB; VHF, 65 dB.

HF, 65 dB; VHF, 68 dB.

3rd/5th/7th/9th order (worst case band):
HF, -35/-40/-53/-56 dB PEP;
VHF, -34/-42/-52/-59 dB PEP;

4 to 56 WPM.

See Figures 1 and 2.

S9 signal, 25 ms.
Unit is suitable for use on AMTOR.

SSB, 39 ms; FM, 36 ms.

See Figure 3.

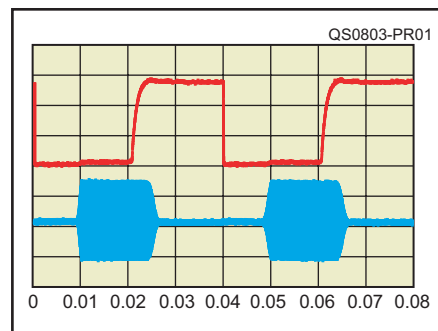


Figure 1 — CW keying waveform for the Yaesu FT-950 showing the first two dits in full-break-in (QSK) mode using external keying. Equivalent keying speed is 60 WPM. The upper trace is the actual key closure; the lower trace is the RF envelope. (Note that the first key closure starts at the left edge of the figure.) Horizontal divisions are 10 ms. The transceiver was being operated at 100 W output at 14.2 MHz.

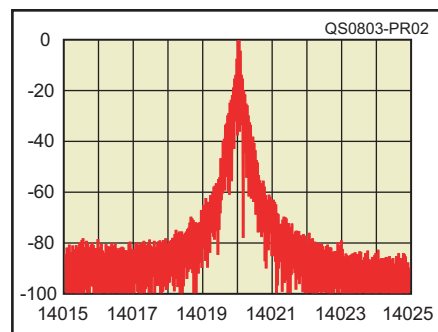


Figure 2 — Worst-case spectral display of the Yaesu FT-950 transmitter during keying sideband testing. Equivalent keying speed is 60 WPM using external keying. Spectrum analyzer resolution bandwidth is 10 Hz, and the sweep time is 30 seconds. The transmitter was being operated at 100 W PEP output at 14.2 MHz.

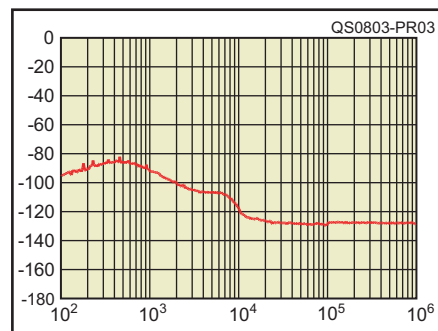


Figure 3 — Worst-case spectral display of the Yaesu FT-950 transmitter output during composite-noise testing. For the red trace, power output is 100 W at 14.2 MHz. The carrier, off the left edge of the plot, is not shown. This plot shows composite transmitted noise 100 Hz to 1 MHz from the carrier.

The 128 page FT-950 *Operating Manual* is well illustrated and does a good job of explaining the radio's features and operation. There's a lot to this radio, and it's worth spending some time going through the manual and trying all of the features and settings. Yaesu offers a PDF version of the manual on the



Figure 4 — The FT-950's rear panel includes connections for two antennas, a linear amplifier, and digital mode interface. Other jacks allow for plug-and-play connection to Yaesu optional μ -Tune units, data management unit, FC-40 external antenna tuner and VL-1000 power amplifier.



Figure 5 — As with other current Yaesu HF transceivers, the display shows filter selection, DSP settings and other important operating parameters at a glance.

Web, ideal for searching for specific items or printing a few pages of menu commands to keep at your operating position.

Sounds Great

The transmitted audio on the FT-950 is beautiful right out of the box. For those who like to customize things, the '950 provides a three band parametric equalizer that can tailor just about any microphone to match or modify any user's voice characteristics. The FT-950 is very capable of transmitting a full-bodied, well articulated voice. With all of the variables and possible combinations of audio settings with the FT-950, you can also make the audio sound bad. Familiarization and practice with the audio equalization tools is necessary to achieve a desired result.

The speech processor in the FT-950 is tricky and requires gentle adjustments to find the proper setting. It is better to rely on your ear or to check with a friend on a quiet band rather than depend on the front panel meter alone to make this adjustment.

In addition to the CW memory keyer mentioned previously, the FT-950 includes menu selectable semi break-in and full break-in (QSK) operation. As shown in Figures 1 and 2, keying characteristics are very similar to the FT-2000, with no noticeable shortening of the first character in QSK mode.

The menus offer several interesting options. You can enable CW keying while in the SSB mode, either on all bands or just on 6 meters. Although they're not that common on HF, cross-mode contacts can be useful on VHF. This feature makes it convenient to call an SSB station on CW without changing modes and retuning if your SSB signal isn't getting through. Another menu option allows you to set the frequency display to show the CW offset or not.

Connections for RF frequency shift (FSK) RTTY or AF frequency shift (AFSK) RTTY and sound card modes and packet operation are handled through the rear panel RTTY/PKT jack, a 6 pin mini-DIN connector. The manual includes the pin-out diagram for this and the transceiver's other connectors all on one page. RTTY parameters such as polarity, shift and tone set are all adjustable via menus. If a PTT connection isn't available, you can use VOX to key the transmitter in the AFSK modes.

FM operation on 6 meters and 10 meters is included. Repeater offset and CTCSS tone encode/decode are selectable via menus.

Fighting QRM

The FT-950 provides many of the same receiver enrichment features that are found in the FT-2000 and FTDX9000 series radios. As with the larger radios, it takes some practice to become proficient at using these state-of-the-art digital processing features. The operator who takes the time to read the manual and become familiar with the FT-950 will surely appreciate all that this innovative transceiver has to offer.

Filter selection is similar to the FT-2000. Initial selectivity is provided by 15, 6 and 3 kHz wide roofing filters. Roofing filter selection is handled by the R.FLT button, and you can choose any filter manually or let the radio make the selection automatically. Automatic selections are 15 kHz for AM and FM, 6 kHz for SSB and 3 kHz for CW and RTTY. The 15 kHz roofing filter is automatically selected regardless of mode when preamplifier 2 is selected or when the noise blanker is turned on.

DSP bandwidth filtering allows a wide range of filter choices for the various modes. Bandwidth is variable in 100 and 150 Hz steps using the WIDTH control, or you can switch in a preset narrower bandwidth by pressing the NAR button. The default wide/narrow settings will work for many operators but it's easy enough to fine-tune things to your liking.

In addition to the standard IF SHIFT and WIDTH controls, the receiver includes several receiver gain settings. Using the IPO (intercept point optimization) switch, you can select one of two preamplifiers or turn the preamps off, whichever is most favorable to the current operating environment. The ATT switch selects from 6, 12 or 18 dB attenuators.

In my review of the FT-2000D radio, I described the interference fighting features as "signal enhancing features." Improving the desired signal and attenuating unwanted signals and noise is the perfect combination for great radio reception. Regardless of the operating situation, familiarization with all of the controls is vital to achieve maximum performance from the FT-950.

The CONTOUR and the DNR are two features that I used a lot on the FT-2000 and I have found them to do a tremendous job at being able to isolate a desired signal. Experimenting with these digital processors and getting to know the effect that they can have on signals is essential to be able to get the most out of the FT-950's performance.

The CONTOUR control allows the operator to move a "low Q notch" across the passband in order to boost or suppress certain frequency components in the IF passband. By altering the passband response, you can improve the readability of a desired signal. This feature is accessed with a push of a button and adjusted via the SELECT knob, and easily accessible menu settings determine the peak/null and width of the notch. In my opinion the CONTOUR control is one of the better tools for signal enhancement and one that I rely on heavily in daily use. For this reason I have chosen to make this the function of the C.S. (custom switch) that allows me to access the CONTOUR menu with a push of a single button rather than scroll through the menus.

Noise Reduction System

The digital noise reduction system (DNR) is a digital signal processing feature that uses 16 separate and unique processing algorithms designed to attack different noise profiles. The DNR can be quickly engaged with a push of a button but unlike the larger rigs the adjustments are made through the menu system. This does not hinder operation very much because the DNR is a feature that does not require constant adjustment.

Like the FT-2000, the '950 has two IF notch filters. A manual notch filter is turned on and off and adjusted with the SELECT knob. As on the FT-2000, we measured a notch depth of more than 60 dB, and the manually operated notch filter is very good for eliminating a single source of interference within the passband.

There's also a digital notch filter (DNF) intended to automatically clean up several tones at once. DNF is enabled by pressing SELECT knob and dialing up a menu choice to turn it off and on. Unfortunately, as we found during the FT-2000 reviews, the DNF doesn't

behave well when presented with multiple signals or noise in the passband. The FT-950's DNF effectively notched a single tone by 60 dB when nothing else is in the passband, but with more than one tone, it sometimes adds audible distortion products and notches the upper tone by a varying amount. Also, DNF is either on or off regardless of mode, so when activated it notches out desired CW

signals as soon as they are tuned in. DNF settings are stored in memory separately for each VFO.

Summary

Employing the latest digital technology found in more expensive transceivers, the FT-950 is well suited as a main radio, backup rig or as part of a SO2R or

multioperator contest station. New HF licensees or casual operators will appreciate the rig's basic operation while contesters, DXers, net operators and others will delight in the FT-950's competition grade heritage.

Manufacturer: Vertex Standard, 10900 Walker St, Cypress, CA 90630; tel 714-827-7600; **www.yaesu.com**.