## SO-239 angular connector

## **TECHNICAL DATA**


Frequency Range:	DC - 600 MHz
Impedance:	$50 \pm 2 \Omega$
Connectors:	UHF-Female, gold plated central pin
Materials:	Chromed Brass, PTFE insulator, Stainless Steel
Mounting Hole:	Ø 16mm, Ø 5/8 in
Operating Temperature:	-40°C to +80°C



**Universal Mounting** 



HI-QUALITY ANTENNAS MADE IN ITALY

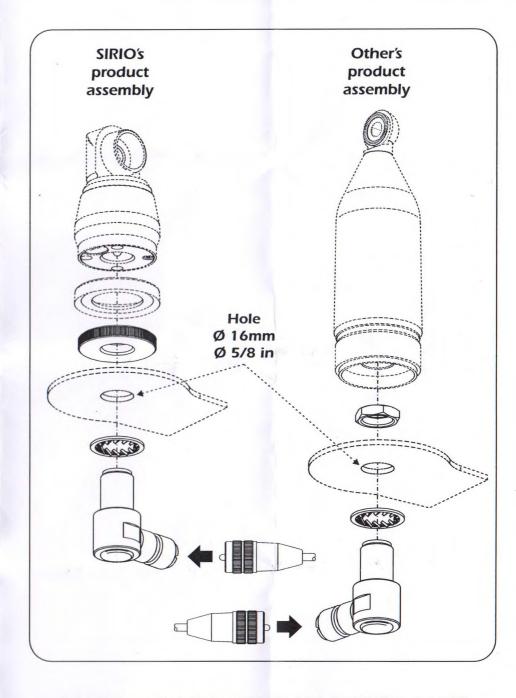

Technical Data are subjected to change - Printed in ITALY - Rev. 26/11/2019 - Cod. ID467