

Specifications

General	Frequencies		UHF1: 400-470MHz; UHF2: 450-520MHz UHF3: 350-400MHz; VHF: 136-174MHz	
	Channel Capacity		1024	
	Zone Capacity		64(each with a maximum of 16 channels)	
	Channel Spacing		12.5 KHz / 20 KHz / 25 KHz*	
	Operating Voltage		13.6 V ± 15%	
	Current Drain	Standby	< 0.6A	
		Receive	< 2.0A	
		Transmit	5W	< 5A
			25W	< 8A
	45W/50W		< 12A	
Frequency Stability		± 0.5ppm		
Antenna Impedance		50 Ω		
Dimensions (H × W × D)		60 × 174 × 200 mm		
Weight		1.7Kg		
LCD Display		220 × 176 pixels, 262000 colors 2.0 inch, 4 rows		
Sensitivity	Analog	0.3 μ V (12dB SINAD);0.22 μ V (Typical) (12dB SINAD) 0.4 μ V (20dB SINAD)		
	Digital	0.3 μ V /BERS5%		
Receiver	Selectivity			
	TIA-603		65dB @ 12.5KHz / 75dB @ 20/25KHz*	
	ETSI		60dB @ 12.5KHz / 70dB @ 20/25KHz*	
	Intermodulation			
	TIA-603		75dB @ 12.5/20/25KHz*	
	ETSI		70dB @ 12.5/20/25KHz*	
	Spurious Response Rejection			
	TIA-603		75dB @ 12.5/20/25KHz*	
	ETSI		70dB @ 12.5/20/25KHz*	
	Blocking			
	TIA-603		90dB	
	ETSI		84dB	
	Hum and Noise		40dB @ 12.5KHz; 43dB @ 20KHz*; 45dB @ 25KHz*	
	Rated Audio Power Output		Internal (@20 ohm load)	3W
			External (@8 ohm load)	7.5W
	Max Audio Power Output		Internal (@20 ohm load)	8W
		External (@8 ohm load)	20W	
Rated Audio Distortion		≤ 3%		
Audio Response		+1 ~ -3dB		
Conducted Spurious Emission		< -57dBm		


Transmitter	RF Power Output	Low Power UHF1 (400-470MHz): 5-25W; UHF2 (450-520MHz): 5-25W UHF3 (350-400MHz): 5-25W; VHF (136-174MHz): 5-25W High Power UHF1 (400-470MHz): 5-45W; UHF2 (450-520MHz): 5-45W UHF3 (350-400MHz): 5-45W; VHF (136-174MHz): 5-50W
	FM Modulation	11K0F3E @ 12.5KHz; 14K0F3E @ 20KHz* 16K0F3E @ 25KHz*
	4FSK Digital Modulation	12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW
	Conducted/Radiated Emission	-36dBm<1GHz; -30dBm>1GHz
	Modulation Limiting	± 2.5KHz @ 12.5KHz; ± 4.0KHz @ 20KHz*; ± 5.0KHz @ 25KHz*
	FM Hum & Noise	40dB @ 12.5KHz; 43dB @ 20KHz*; 45dB @ 25KHz*
	Adjacent Channel Power	60dB @ 12.5KHz; 70dB @ 20/25KHz*
Environmental Specifications	Audio Response	+1 ~ -3dB
	Audio Distortion	≤ 3%
	Digital Vocoder Type	AMBE++or SELP
	Digital Protocol	ETSI-TS102 361-1,-2,-3
	Operating Temperature	-30℃ ~ +60℃
	Storage Temperature	-40℃ ~ +85℃
	ESD	IEC 61000-4-2 (level 4) ± 8kV (contact) ± 15kV (air)
	American Military Standard	MIL-STD-810 C/D/E/F/G
	Dust & Water Intrusion	IP54 Standard
	Humidity	Per MIL-STD-810 C/D/E/F/G Standard
Shock & Vibration	Per MIL-STD-810 C/D/E/F/G Standard	
GPS (for MD78XG only)	Accuracy specs are for long-term tracking(95th percentile values)>5 satellites visible at a nominal -130dBm signal strength)	
	TTFF (Time To First Fix) Cold Start	<1 minute
	TTFF (Time To First Fix) Hot Start	<10 seconds
	Horizontal Accuracy	<10 meters

* 20KHz/25KHz will not be available on new equipment in the U.S. after 1/1/2011.
All Specifications are tested according to applicable standards, and subject to change without notice due to continuous development.


Standard Accessories

Palm Microphone	Microphone Hanger	Microphone Hanger Screws	Mounting Bracket
Power Cord	Fuse	GPS Antenna (for MD78XG only)	


Optional Accessories




External Speaker
SM09D1



Desktop Microphone
SM10A1




320W External
Power Supply
PS22002



Programming
Cable (USB Port)
PC37




Data Cable
PC40



Keypad Microphone
SM19A1*



Antenna




GPS Antenna




1DIN vehicle
mounting bracket



Adaptor cable for
repeater accessory pin



Dispatch cable



Mobile Radio Remote
Mount Kit

Pictures above are for reference only and may vary from actual products.



Hytera Communications Corporation Limited
Address: HYT Tower, Hi-Tech Industrial Park North,Beihuan Rd.,
Nanshan District,Shenzhen,China
Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057
Http://www.hytera.com Stock Code: 002583.ZS

Hytera retains right to change the product design and specification. Should any printing mistake occur,
Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated
by printing materials will occur by printing reason.
HYT, Hytera are registered trademarks of Hytera Co., Ltd. © 2012 Hytera Co., Ltd. All Rights Reserved.



ClassicInternational
Experts in Wireless Communication



MD78X/78XG

Versatile Digital Mobile Two-Way Radio

- Large-size HD Transflective Color Display
- Superior Digital Voice



THE NETHERLANDS | Roermond
Tel. +31 (0)475-327390
www.classicinternational.eu

GERMANY | Mönchengladbach
Tel. +49 (0)2166-33061
www.classicinternational.eu

www.hytera.com

Hytera Communications Corporation Limited

EN2012005A



MD78X/78XG

Higher Efficiency,
Richer Experience


As a product built to the DMR standard, MD78X/78XG (MD78XG is the model with GPS) is endowed with ergonomic design, all-round digital functions and remarkable quality to increase your management efficiency and enable you to be responsive to emergent situations.

Applications

Public Safety
Forest Industry

Public Utilities
Business

Transportation (port, airport, railway, etc.)
Manufacturing

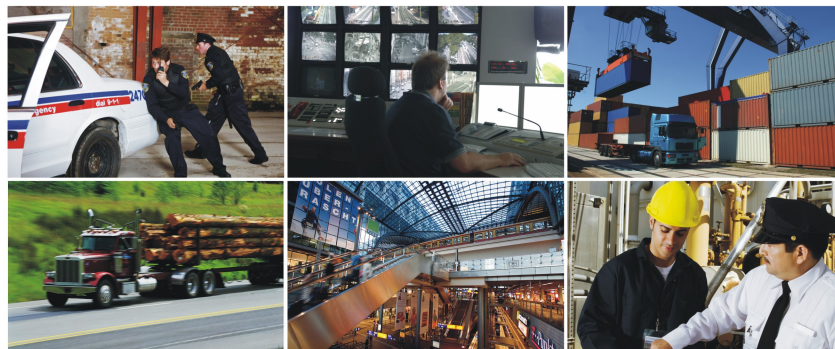

Product Features

- **User-centered Design**
The large-size color display allows good visibility even under extremely strong light. And the seven programmable keys facilitate your communication in various conditions.
- **Reliable Quality**
MD78X/78XG is strictly compliant with MIL-STD-810 C/D/E/F/G and IP54 standards, ensuring outstanding performance even under harsh environments.
- **Superior Voice**
With the combined application of narrowband codec and digital error-correction technologies, MD78X/78XG is capable of ensuring you superior voice under noisy environments or at the edge of the coverage area. In addition, the adoption of the AGC technology also optimizes your voice. With a built-in 4W speaker, MD78X/78XG ensures clear and crisp voice communication.
- **Higher Spectrum Efficiency, Higher Channel Capacity**
Benefiting from the TDMA technology, MD78X/78XG allows twice the channels based on the same spectrum resource. This is a big help to relieve the stress of increasing shortage in spectrum resource.
- **Dual-slot Pseudo Trunk**
With this feature, the free slot can be allocated to a member that needs to communicate, effectively enhancing frequency efficiency and allowing you to communicate timely under emergency situations.
- **Secure Communication**
Besides the intrinsic encryption of the digital technology, MD78X/78XG provides enhanced encryption capability (such as 256-bit encryption algorithm) and the Scrambler feature (selectable).
- **Versatile Services**
In addition to conventional communication services, MD78X/78XG features rich data services and selectable functions such as Text Message, Scan, Emergency, Channel Steering, Auto Registration, High-speed Data Transmission* and Lone Worker.
- **Further Development Port**
The reserved front and rear port in MD78X/78XG allows users or any third party partner to further develop other helpful applications to extend the radio functionalities!
- **Option Board Interface**
MD78X/78XG supports option board interfaces to radio, allowing third party partner to develop various applications to interconnect with radios to control the radio to expand its functionalities! Among the supported features are voice recording, encryption* etc. Please refer to the API Partner Programmed for more information!

Main Functions

- **Dual Modes (Analog+Digital)**
MD78X/78XG can operate in either analog or digital mode. It is compatible with the prevalent analog system, ensuring a smooth analog-to-digital transition.
- **Versatile Voice Calls**
Intelligent signaling of MD78X/78XG supports various voice call types, including Private Call, Group Call, All Call and Emergency Call.
- **GPS**
MD78XG supports viewing of GPS positioning information and sending of GPS text message.
- **Data Services**
MD78X/78XG supports data capabilities of sending Private, Group text message. It also supports Third Party to control the radio via Third party API (GPS, Radio Registration Services, Radio Call Control, Telemetry*, Data Transfer*), via Telemetry control to radio.
- **Accessory Expansion**
MD78X/78XG supports third party to develop accessories expansion via front and rear port of the mobile. (Check out that features as channel steering, emergency footswitch has been supported via the back port!)
- **Various Analog Signaling Types**
MD78X/78XG supports various analog signaling types (HDC1200, DTMF*, 2-Tone and 5-Tone), various squelch control types (CTCSS/CDCSS), thus providing higher function expansion capacity to the analog world.
- **Supplementary Services**
MD78X/78XG supports supplementary services of Radio Check, Remote Monitor, Call Alert, Radio Enable and Radio Disable.
- **Multiple Languages**
MD78X/78XG supports up to 13 languages, including English, Simplified Chinese, Traditional Chinese, German, Spanish, French, Italian, Polish, Russian, Turkish, Greek and Portuguese, allowing users to select it per their needs.
- **One Touch**
MD78X/78XG supports One Touch features that comprise of Text Message, Voice Calls and Supplementary Services.
- **Scan**
MD78X/78XG supports scanning of pure analog voice and signaling, pure Digital voice and data, and also mix mode scan that comprise of Analog and Digital activities.
- **Roaming**
MD78X/78XG supports automatic roaming of all sites in a IP Multi-site Connect system.
- **Privacy of Voice and Data**
MD78X/78XG supports analog scrambling, and digital encryption using Advanced Encryption Standard (AES) and ARCFOUR (ARC4) encryption methodology to both voice and data.
- **Analog/Digital Telephone Interconnect (via DTMF signaling)**
MD78X/78XG supports simplex voice communications between radio and telephone users. It allows a radio user to make a telephone call; or a telephone user to make either a Group or Private call to radio users. This feature utilizes the Commercial Off The Shelf (COTS) Analog Phone Patch boxes and a Plain Old Telephone Service (POTS) line to connect the radio users to the Corporate Office Phone System (PBX) or Public Switched Telephone Network (PSTN).
- **Software Upgradable**
With this capability, you can enjoy firmware upgrade without purchasing a new piece of radio hardware!

* indicates functions available in later version.

Notes: PD70X/70XG, X=0, 2, 5 or 8, model number varies geographically. For details, please contact our regional sales representatives.