

2x11 elements Yagi antenna

144 to 146 MHz

Part Nr. 220822



Electrical data

Radiation at 144.9 MHz

Effective electrical length : 2.20λ

Isotropic gain : 14.0 dBi

Aperture angle @ -3 dB

- E-plane : $2 \times 18.3^\circ$

- H-plane : $2 \times 20.3^\circ$

First side lobe set

- E-plane : -18.0 dB @ 50°
- H-plane : -12.5 dB @ 50°

Rear protection : -18.5 dB

Average stray radiation

- E-plane : -36 dB
- H-plane : -24 dB

Bandwidth

Gain @ -1 dB : 142 to 148 MHz

Nominal impedance : 50Ω

Impedance match bandwidth @ SWR <1.3/1 : 139.5 to 146.7 MHz

Acceptable RF power (continuous duty) : 1000 W

Required phase delay between frontmost and

rearmost driven element : 59°

Array of 2 or 4 antennas

(optimized stacking distance. from center to
center of elements. for minimal side lobe
radiation)

- Electrical distance : 1.46λ
- Practical distance : 3.05 m

Mechanical data

Connector : N

Overall length : 4.62 m


Mass : 4.2 kg

Effective wind load : 0.2 m^2


Approximate wind load (25 m/s - 55 mph) : 7.6 daN

Approximate wind load (45 m/s - 100 mph) : 24.5 daN

Radiation patterns

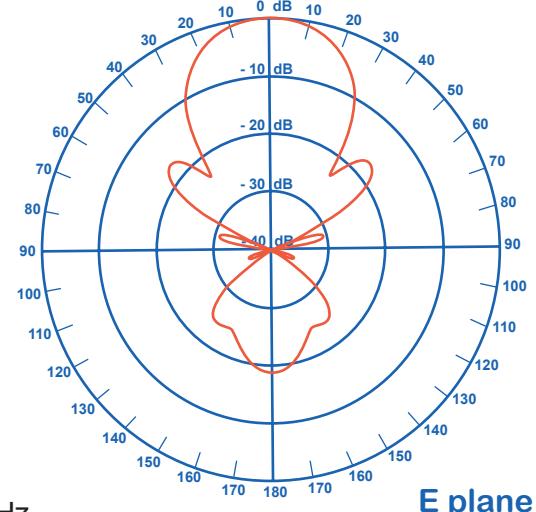

E plane

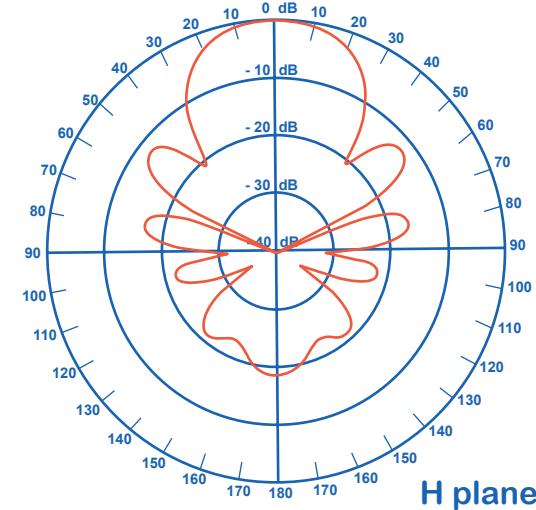

H plane